



SERIES UFM2 | COMPACT ULTRASONIC FLOWMETERS



FEATURES/BENEFITS

- Non-invasive pipe measurement
- Simple installation with all necessary components included such as converter, sensor, cables and mounting accessories
- Compact and lightweight design, featuring an easily installed, all in one clamp-on unit intended for homogeneous liquids that contain no air
- Screen offers easy-to-read text displaying both flow rate and total with a convenient backlight for visual comfort

APPLICATIONS

- Flow measurement for heat metering
- Metering and monitoring in:
 - Chilled water
 - Potable water
 - Process water

DESCRIPTION

The **Series UFM2 Compact Ultrasonic Flowmeters** are economical, clamp-on, ultrasonic flowmeters. The UFM2 implements the transit-time difference to measure flow rates in pipes and can measure velocity and flow in pipes with outside diameters ranging from 3/4 to 7" (25 to 180 mm). This model comes with a volume pulse and 4-20 mA flow rate output.

SPECIFICATIONS


Service	Clean water with <3% by volume of particulate content.
Range	0.33 to 32.8 ft/s (0.1 to 10 m/s).
Display	Backlit: 3.27" H x 0.74" W (83.1 mm x 18.8 mm), 2 line x 16 characters.
Accuracy	±3% of flow reading for >0.98 ft/s (>0.3 m/s).
Power Requirements	12-24 VDC/VAC.
Power Consumption	7 W max.
Temperature Limits	Process: 32 to 185°F (0 to 85°C); Ambient: 32 to 122°F (0 to 50°C).
Outputs	Analog: 1 opto-isolated: 4-20 mA; Error current: 3.5 mA; Load resistance: 620 Ω max; Pulse: 1 opto-isolated MOSFET relay, 500 mA max, 166 pps max, 200 Hz max.
Enclosure Rating	IP54.
Enclosure Material	Plastic polycarbonate.
Repeatability	±0.15% of measured value.
Electrical Connections	16.4' (5 m) cable.
Response Time	<1 s.
Weight	2.9 lb (1.315 kg).
Agency Approvals	CE.

ADDITIONAL SPECIFICATIONS


Applicable Pipe Material	Steel, copper, or plastic
Pipe Outside Diameter	3/4 to 7" (25 to 180 mm)*.
Applicable Pipe Lining	None.
Pipe Wall Thickness	0.02 to 0.39" (0.5 to 10 mm).

*Pipe size is dependent on pipe material and internal diameter.

DIMENSIONS

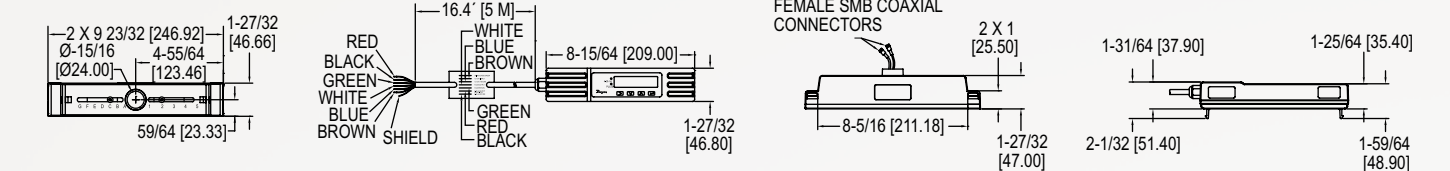

WIRING DIAGRAM

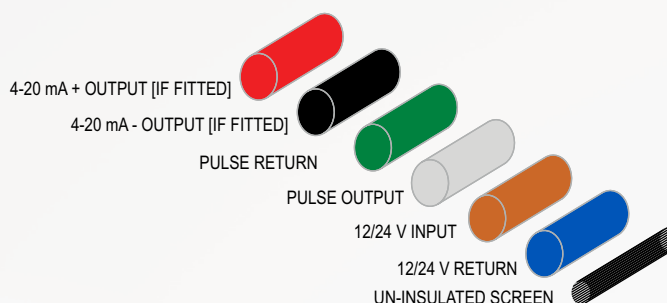

6-core main interface cable

HOW TO ORDER

Use the **bold** characters from the chart below to construct a product code.

SERIES _____

UFM2: Compact ultrasonic flowmeter

OUTPUT TYPE _____

-1: Pulse and 4-20 mA outputs

UFM2

-1

-4

-NISTCAL-FU

OPTIONS

-NISTCAL-FU: NIST traceable calibration certificate for ultrasonic flowmeters. **Note:** Equal certs will be charged per units purchased.

PIPE SIZE

-4: 3/4 to 4" (25 to 115 mm)

-6: 5 to 7" (125 to 180 mm)

ORDER ONLINE TODAY!

dwyer-inst.com/Product/SeriesUFM2

Modbus® is a registered trademark of Schneider Automation, Inc.



DWYER INSTRUMENTS, INC.

©Copyright 2020 Dwyer Instruments, Inc.
Printed in U.S.A. 11/20

DS-UFM2

Important Notice: Dwyer Instruments, Inc. reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Dwyer advises its customers to obtain the latest version of the relevant information to verify, before placing any orders, that the information being relied upon is current.